

*Art Asia*



# *Art Asia*

*Summer 2017*






Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"><li>• Trowel</li><li>• Korck</li></ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0016	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0036	Sponge




Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"> <li>• Trowel</li> <li>• Korck</li> </ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0011	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0083	Sponge

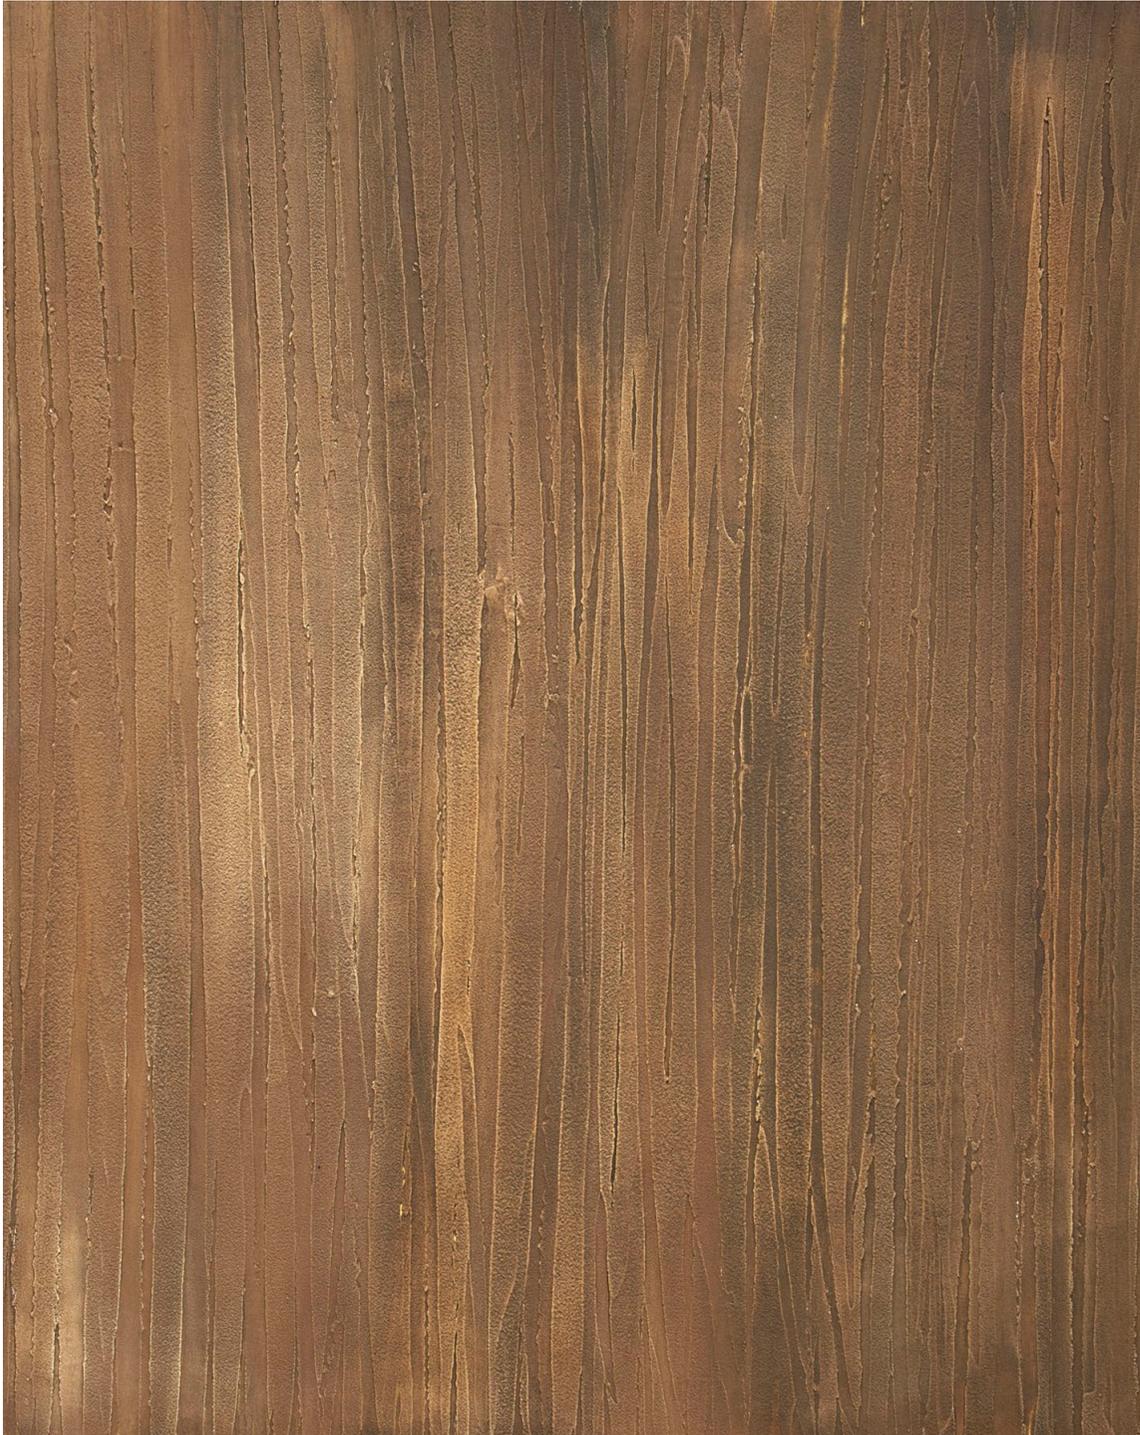

Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"> <li>• Trowel</li> <li>• Korck</li> </ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0013	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0030	Sponge




Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"><li>• Trowel</li><li>• Korck</li></ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0004	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0036	Sponge

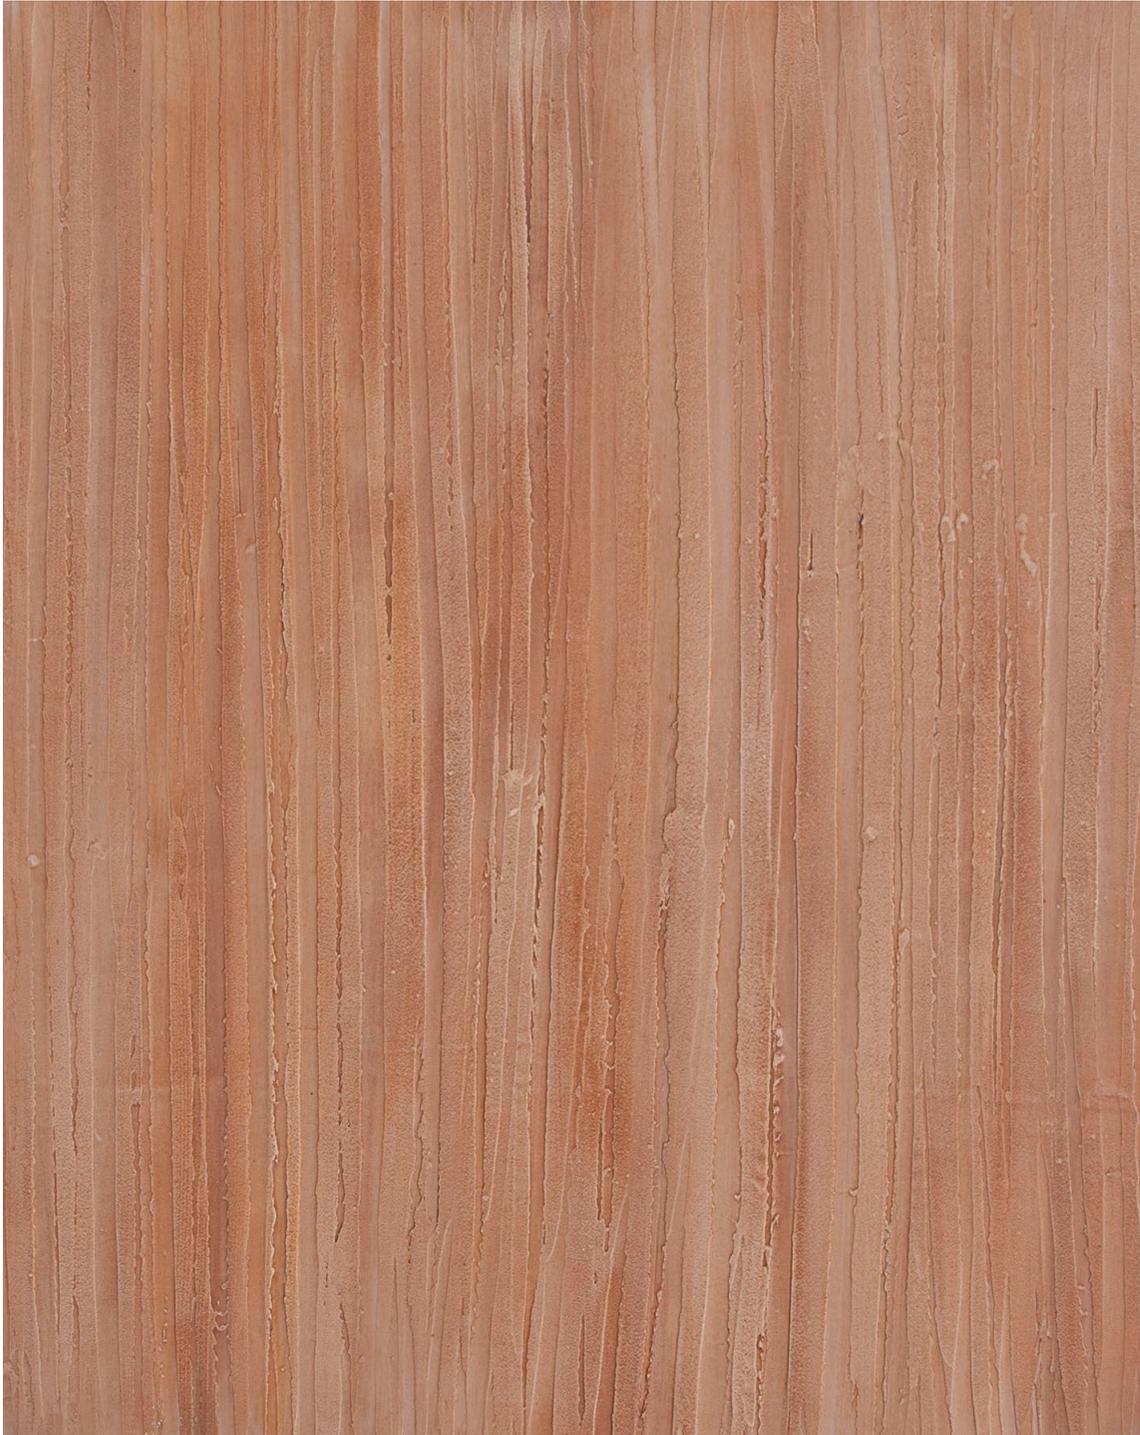

Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"> <li>• Trowel</li> <li>• Korck</li> </ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0011	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0083	Sponge



Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"> <li>• Trowel</li> <li>• Korck</li> </ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0033	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0044	Sponge

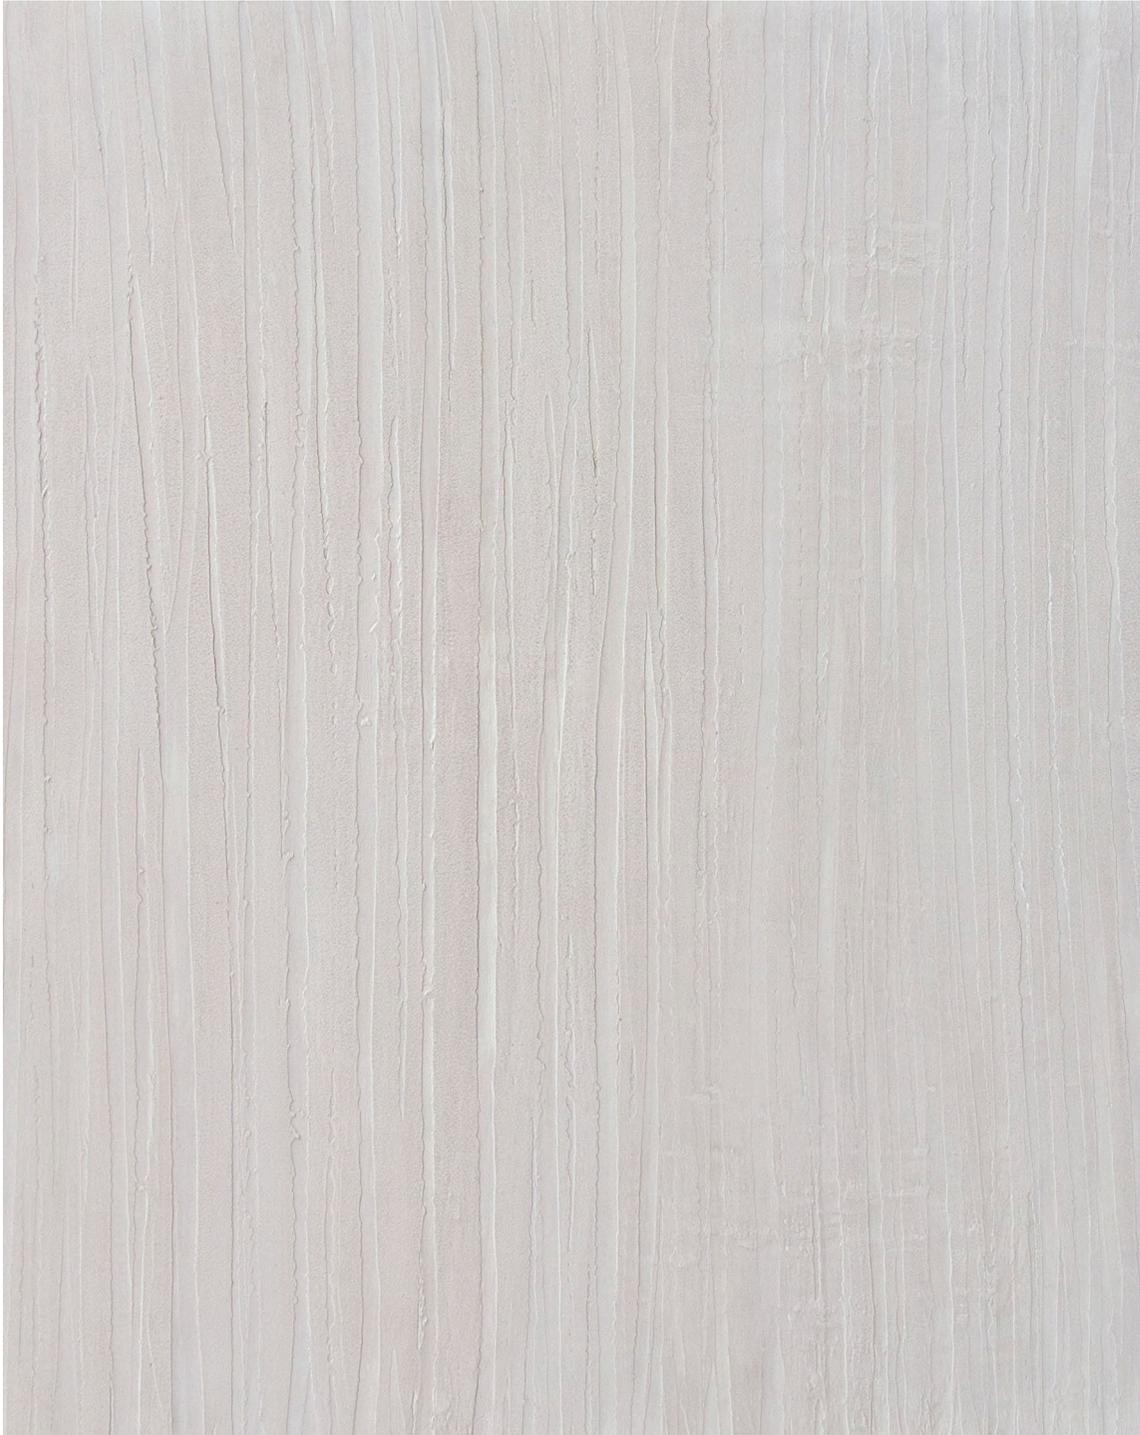

Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"><li>• Trowel</li><li>• Korck</li></ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0068	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0044	Sponge




Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"> <li>• Trowel</li> <li>• Korck</li> </ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0108	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0084	Sponge



Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"> <li>• Trowel</li> <li>• Korck</li> </ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0102	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0083	Sponge



Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"> <li>• Trowel</li> <li>• Korck</li> </ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0032	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0028	Sponge

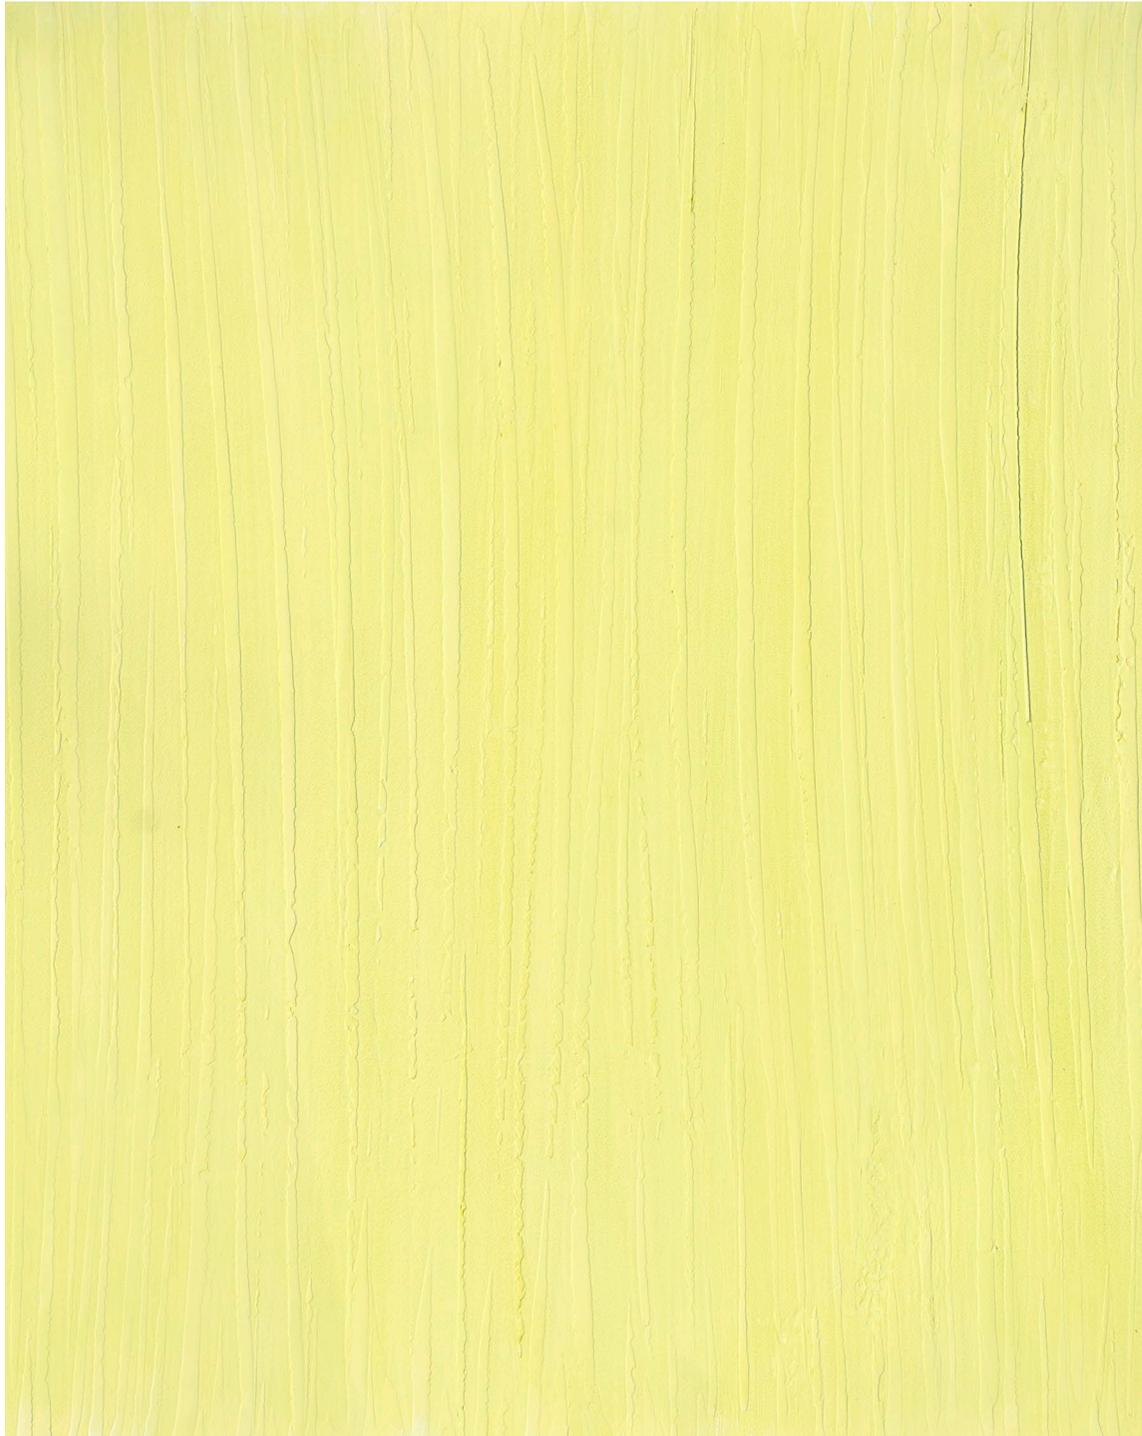

Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"><li>• Trowel</li><li>• Korck</li></ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0104	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0088	Sponge



Step	Name	Coats	Yields	Color code	Tools
1	Primer Normal	1	1lt/10 m <sup>2</sup>	x	Roller
2	Ruvido	1	1lt/10 m <sup>2</sup>	x	Roller
3	ROCCIA	1	1kg/0,5 m <sup>2</sup>	x	<ul style="list-style-type: none"> <li>• Trowel</li> <li>• Korck</li> </ul>
4	Velatura	1	1lt/10 m <sup>2</sup>	VLT0096	Sponge
5	Velatura	1	1lt/10 m <sup>2</sup>	VLT0047	Sponge

## PRIMER NORMAL

### Acrylic Concentrated Fixative

Water-based fixative for interior and exterior use, formulated with acrylic emulsions. This primer penetrates into the plaster and seals the porous surfaces by bonding unrelated parts of them. It provides both a good vapour permeability and an excellent adhesion for finish coatings. Making surface absorption uniform, PRIMER NORMAL allows colour uniformity during application of paints.

### Application

Dilution from 1:5 to 1:8 by volume with water.

Brush: Use a nylon/polyester or a natural bristle brush.

Roller: Use a nap synthetic or lamb's wool roller cover.

Airless Pressure: 140 – 160 bar (2000 – 2350 psi). Tip: 0.017” – 0.021”.

Dilution depends on the airless system in use. A trial application is strongly recommended prior to the commencement of work.

Temperature of application: +5 ÷ +35 °C

Relative humidity of application: < 85 %

Touch dry: 30 minutes

Recoat after: 4 ÷ 5 hours

Completely Cured: 7 days

Cleaning tools: by water

Density: 1 Kg/L

pH: 7-8

Weight Solids: 25%

Coverage: 8 – 10 m<sup>2</sup>/L

Colour: Clear

Gloss Levels: Translucent

Pack Size: 1 - 5 - 10 – 20 L

## RUVIDO

### Vinyl Masonry Paint

Vinyl water-based masonry paint, formulated with finely milled silica flours and high resistance fillers. It provides both the professional and the private with a high hiding, weather resistant and easy to apply product.

### Application

Brush: Use a nylon/polyester or a natural bristle brush. Thin by up to 20-25% by volume with water both the first and the second coat.

Roller: Use a 3/8” - 3/4” nap synthetic or lamb's wool roller cover. Thin by up to 20-25% by volume with water both the first and the second coat.

Airless Pressure: 140 – 160 bar (2000 – 2350 psi). Tip: 0.019” – 0.021”.

Dilution depends on the airless system in use. A trial application is strongly recommended prior to the commencement of work.

Temperature of application: +5 ÷ +35 °C

Relative humidity of application: < 85 %

Dry film thickness: 50 ÷ 100 µm per coat

Touch dry: 30 minutes

Recoat after: 5 ÷ 6 hours

Completely Cured: 21 days

Cleaning tools: by water

Density: 1.60 ÷ 1.65 Kg/L

Viscosity: 25000 ÷ 30000 cPs

pH: 7-8

Weight Solids: 73%

Coverage: 6 – 10 m<sup>2</sup>/L

Colour: Many Colours

Gloss Levels: Matt

Pack Size: 0.75 - 4 - 14 L



## ROCCIA

### Lime Based Decor Plaster

Is a mouldable high thickness coating for interior use. It has been formulated with elastomeric emulsions and high resistant fillers and pigments. Its lightness allows the tools to move smoothly without much effort, retaining the pattern left by the tool that created it the irregularities of the old walls, the effects bamboo or natural wood. Thanks too cellulose fibers filler decor covering provide high sound attenuation which useful for private theater or big halls. This product is perfect raw material for sculptor artists to make bass-relief.

### Application

Apply the product as such. The filling and elastomeric properties of the product allows the application also on imperfect walls or having problems with cracks and fractures. The thickness that is obtained by the play of different finishes can level and enhance the properties of the support in an optimal manner and stable over time. Apply ArtAsia by means of a spatula made of steel or plastic, for thicknesses of about 1-3 mm and then, still wet work it by means of special decor tools until obtaining the desired effect.

Temperature for application: +5÷ +36°C  
 Relative humidity for application: < 85%  
 Recommended thickness: 1 ÷ 3 mm per coat  
 Touch Dry: 4÷6 h  
 Recoatable after: 24 h  
 Completely cured: 48 h  
 Cleaning tools: by water  
 Drying time for washing: 30 days

Density: 1,15 ÷ 1,25 Kg/L  
 pH: 7-8  
 Weight Solids: 62%  
 Coverage: 0,5 – 1 m<sup>2</sup>/Kg  
 Colour: Color Chart  
 Gloss Levels: Matt  
 Pack Size: 25 Kg

## VELATURA

### Protective buffer matt glaze with aging effect

Decorative glaze based on siloxane resins with a high degree of permeability to vapor and water repellency.

The siloxane glaze is used in decorative finishes for interior and to protect and decorate exterior facades. It is applied on washable paints, quartz made paints, lime paints and silicate or siloxane paints. Suitable for the decoration and protection of plasters.

### Application

Apply Velatura crossing the brush strokes one over the other until completion of the surface thus obtaining an antique decoration, breathable and water repellent. Also you can use for application different kinds of sponge.

Temperature of application: +5 ÷ +35 °C  
 Relative humidity of application: < 85 %  
 Dry film thickness: 20 ÷ 35 micron per coat  
 Touch dry: 4 ÷ 6 h  
 Recoatable after: 12 hours  
 Completely Cured: 24 h  
 Cleaning tools: by water

Density: 0,9 ÷ 1 Kg/L  
 pH: 7-8  
 Weight Solids: 15%  
 Coverage: 8 – 10 m<sup>2</sup>/Lt  
 Colour: Color Chart  
 Gloss Levels: Matt Translucent  
 Pack Size: 0,75 - 4 Lt

